


DRUID E CORE BUILDS



	Druid E CorE Build 1 \$20,299.95	Druid E CorE Build 2 \$16,899.95	Druid E CorE Build 3 \$15,499.95
FRAME	Druid E Full Carbon - 150mm Travel High-Modulus Carbon Fiber Trifecta V3 High Pivot 4-Bar Suspension One Ride Geometry Enduro Max Bearings	Druid E Full Carbon - 150mm Travel High-Modulus Carbon Fiber Trifecta V3 High Pivot 4-Bar Suspension One Ride Geometry Enduro Max Bearings	Druid E Full Carbon - 150mm Travel High-Modulus Carbon Fiber Trifecta V3 High Pivot 4-Bar Suspension One Ride Geometry Enduro Max Bearings
FORK	RockShox Zeb Ultimate 160mm Travel Charger 3 RC2 W/ButterCup Debonair + Rebound, HSC/LSC Adjust Pressure Relief Valves 44mm Offset Maxle Stealth Thru-Axle Gloss Black	RockShox Zeb Select+ 160mm Travel Charger 3.1 RCT Debonair + Rebound HSC/LSC Adjust 44mm Offset Maxle Stealth Thru-Axle Gloss Black	RockShox Zeb Select+ 160mm Travel Charger 3.1 RCT Debonair + Rebound HSC/LSC Adjust 44mm Offset Maxle Stealth Thru-Axle Gloss Black
REAR SHOCK	RockShox Vivid Ultimate TouchDown RC2T Damper Rebound, HSC/LSC Adjust Threshold Lever Bearing Adapter Eyelets R54 C26 w/ Hydraulic Bottom Out 210x55mm	RockShox Vivid Select+ TouchDown RC2 Threshold Lever Bearing Adapter Eyelets R45 C26 Tune w/ Hydraulic Bottom Out 210x55mm	RockShox Vivid Select+ TouchDown RC2 Threshold Lever Bearing Adapter Eyelets R45 C26 Tune w/ Hydraulic Bottom Out 210x55mm
HEADSET	FSA Orbit ZS Headset SHIS: ZS44/28.6 ZS56/40 Sealed Cartridge Bearings 6000 Series Alloy Cups And Materials Sealed Steel Crown Race	FSA Orbit ZS Headset SHIS: ZS44/28.6 ZS56/40 Sealed Cartridge Bearings 6000 Series Alloy Cups And Materials Sealed Steel Crown Race	FSA Orbit ZS Headset SHIS: ZS44/28.6 ZS56/40 Sealed Cartridge Bearings 6000 Series Alloy Cups And Materials Sealed Steel Crown Race
GRIPS	Forbidden 128mm length Single Sided Lock-On Black	Forbidden 128mm length Single Sided Lock-On Black	Forbidden 128mm length Single Sided Lock-On Black
HANDLE BARS	OneUp Alloy 800mm Width S1-S2:20mm / S3-S4:35mm Rise 8° Backsweep 5° Upward 35mm Bar Bore 7075 Aluminum / Black	OneUp Alloy 800mm Width S1-S2:20mm / S3-S4:35mm Rise 8° Backsweep 5° Upward 35mm Bar Bore 7075 Aluminum / Black	Forbidden 800mm Width S1-S2:22.5 / S3-S4:38mm Rise 9° Backsweep 5° Upward 35mm Bar Bore Black
STEM	OneUp 40mm Length 35mm Bar Clamp Black Forged 6061 Aluminum	OneUp 40mm Length 35mm Bar Clamp Black Forged 6061 Aluminum	Forbidden 40mm Length 35mm Bar Clamp Black
SEAT POST	OneUp Dropper Post 31.6mm Size Specific Travel S1:150mm / S2:180mm / S3:210mm / S4:240mm	OneUp Dropper Post 31.6mm Size Specific Travel S1:150mm / S2:180mm / S3:210mm / S4:240mm	TranzX +RAD Travel Adjust Dropper 31.6mm Size Specific Travel S1:150mm / S2:170mm / S3:200mm / S4:230mm
SEAT POST REMOTE	OneUp MMX UFT Lever Aluminum Remote Oversized Bearing MatchMaker X Integrated Dropper Remote	OneUp MMX UFT Lever Aluminum Remote Oversized Bearing MatchMaker X Integrated Dropper Remote	TranzX GLS Aluminum Remote Bearing MatchMaker X Integrated Dropper Remote
SEAT POST CLAMP	Forbidden 7075 CNC Aluminum 34.9mm Black Anodized	Forbidden 7075 CNC Aluminum 34.9mm Black Anodized	Forbidden 7075 CNC Aluminum 34.9mm Black Anodized
SADDLE	Fizik Terra Aidon X5 145mm Width X5: Ride-Compliant Fiber Reinforced Nylon Shell And S-Alloy Rail Black	Fizik Terra Aidon X5 145mm Width X5: Ride-Compliant Fiber Reinforced Nylon Shell And S-Alloy Rail Black	Forbidden 143mm Width Atmos Shaping Cro-Mo Rail Black
FRONT BRAKE	SRAM Maven Ultimate 4-Piston Stealth Body SwingLink Reach & Contact Adjustment Organic Pads	SRAM Maven Silver 4-Piston Stealth Body SwingLink Reach & Contact Adjustment Organic Pads	SRAM Maven 4-Piston Stealth Body Reach Adjustment Organic Pads
FRONT BRAKE ROTOR	SRAM HS2 - 200mm 6-Bolt 2.0mm Thickness	SRAM Centerline - 200mm 6-Bolt 2.0mm Thickness	SRAM Centerline - 200mm 6-Bolt 2.0mm Thickness
REAR BRAKE	SRAM Maven Ultimate 4-Piston Stealth Body SwingLink Reach & Contact Adjustment Organic Pads	SRAM Maven Silver 4-Piston Stealth Body SwingLink Reach & Contact Adjustment Organic Pads	SRAM Maven 4-Piston Stealth Body Reach Adjustment Organic Pads
REAR BRAKE ROTOR	SRAM HS2 - 200mm 6-Bolt 2.0mm Thickness	SRAM Centerline - 180mm 6-Bolt 2.0mm Thickness	SRAM Centerline - 200mm 6-Bolt 2.0mm Thickness
REAR SHIFTER	SRAM Pod Rocker With MMX Clamp AXS Controller Rocking Actuation	SRAM Pod Rocker With MMX Clamp AXS Controller Rocking Actuation	SRAM Eagle 90 With MMX Clamp Single Click Two Button Design
REAR DERAILLEUR	SRAM XO AXS T-Type 12speed Hangerless Interface Overload Clutch Replaceable Skid Plates	SRAM GX AXS T-Type 12speed Hangerless Interface Overload Clutch Replaceable Skid Plates	SRAM Eagle 90 T-Type 12speed Hangerless Interface Replaceable Skid Plates
CASSETTE	SRAM XO T-Type 10-52T 12speed 12speed XD Fit 10-12-14-16-18-21-24-28-32-38-44-52T	SRAM Eagle 70 T-Type 10-52T 12speed 12speed XD Fit 10-12-14-16-18-21-24-28-32-38-44-52T	SRAM Eagle 70 T-Type 10-52T 12speed 12speed HG Fit 10-12-14-16-18-21-24-28-32-38-44-52T
CHAIN	SRAM GX Transmission Flattop - 12speed 12speed Links = S1:120 / S2:122 / S3:124 / S4:126	SRAM GX Transmission Flattop - 12speed 12speed Links = S1:120 / S2:122 / S3:124 / S4:126	SRAM GX Transmission Flattop - 12speed 12speed Links = S1:120 / S2:122 / S3:124 / S4:126
CRANKSET	Praxis EC-Type 2 Alloy 150mm SRAM 34T Chainring 55mm Chainline Black	Praxis EC-Type 2 Alloy 150mm SRAM 34T Chainring 55mm Chainline Black	Praxis EC-Type 2 Alloy 150mm SRAM 34T Chainring 55mm Chainline Black
PEDALS	Not included	Not included	Not included
UPPER CHAIN GUIDE	Forbidden Race Guide	Forbidden Race Guide	Forbidden Race Guide
LOWER CHAIN GUIDE			
BOTTOM BRACKET	Avinox ISIS Interface	Avinox ISIS Interface	Avinox ISIS Interface
FRONT HUB	Crank Brothers 110x15mm 28-Hole 6-Bolt Black Anodized	Crank Brothers 110x15mm 28-Hole 6-Bolt Black Anodized	Novatec 110x15mm 32Hole 6-Bolt Black Anodized
FRONT AXLE	Maxle Stealth Included With Fork	Maxle Stealth Included With Fork	Maxle Stealth Included With Fork
REAR HUB	Crank Brothers Ratchet Internals XD Driver 148x12mm 32hole 6-Bolt Black Anodized Decal	Crank Brothers Ratchet Internals XD Driver 148x12mm 32hole 6-Bolt Black Anodized Decal	DT Swiss 370 Hybrid Ratchet Internals HG Driver 148x12mm 32-Hole 6-Bolt
REAR AXLE	SRAM 180 x 1.0mm Axle UDH	SRAM 180 x 1.0mm Axle UDH	SRAM 180 x 1.0mm Axle UDH
SPOKES	Sapim CX Ray/Race Front: CX Ray 2.0/0.9/2.2/2.0mm / Rear: Race 2.0/1.25/2.25/2.0mm Aero Black ED Coated Stainless Black Brass 14mm Nipples	Sapim Race Race 2.0/1.8/2.0mm Double Butted Black ED Coated Stainless Black Brass 14mm Nipples	Pillar Racing Spoke 2.0/2.0/2.3mm Double Butted Black ED Coated Stainless Black Brass 14mm Nipples
RIMS	Crankbrothers Synthesis - E-Bike - Carbon Front 31.5mm / Rear 29.5mm Internal Width Tubeless Ready Black with Grey Graphics	Crankbrothers Synthesis - E-Bike - Alloy Front 31.5mm / Rear 29.5mm Internal Width Tubeless Ready Black with Grey Graphics	Race Face ARC OFFSET ARC HD 30 29" Front / ARC HD 30 27.5" Rear 30mm Internal Width Black with Grey Graphics
FRONT TIRE	Maxxis High Roller - 3C MaxxGrip - EXO+ 29 x 2.4 3C MaxxGrip Rubber Compound 60tpi Folding Tubeless Ready EXO+ Casing	Maxxis High Roller - 3C MaxxGrip - EXO+ 29 x 2.4 3C MaxxGrip Rubber Compound 60tpi Folding Tubeless Ready EXO+ Casing	Maxxis High Roller - 3C MaxxGrip - EXO+ 29 x 2.4 3C MaxxGrip Rubber Compound 60tpi Folding Tubeless Ready EXO+ Casing
REAR TIRE	Maxxis Minion DHR2 - 3C MaxxTerra - DD 27.5 x 2.5 3C MaxxTerra Rubber Compound 120tpi Folding Tubeless Ready DD Casing	Maxxis Minion DHR2 - 3C MaxxTerra - DD 27.5 x 2.5 3C MaxxTerra Rubber Compound 120tpi Folding Tubeless Ready DD Casing	Maxxis Minion DHR2 - 3C MaxxTerra - DD 27.5 x 2.5 3C MaxxTerra Rubber Compound 120tpi Folding Tubeless Ready DD Casing
MOTOR	Avinox M1 Avinox M1 Drive Unit: 105 N-m Avinox Screen: 2-inch OLED Control Display Avinox Wireless Controllers: Right and left sides	Avinox M1 Avinox M1 Drive Unit: 105 N-m Avinox Screen: 2-inch OLED Control Display Avinox Wireless Controllers: Right and left sides	Avinox M1 Avinox M1 Drive Unit: 105 N-m Avinox Screen: 2-inch OLED Control Display Avinox Wireless Controllers: Right and left sides
BATTERY	Avinox Avinox Integrated Li-ion Battery: 800Wh Voltage 35.9 V Protection Rating IP56 Capacity 22.3 Ah	Avinox Avinox Integrated Li-ion Battery: 800Wh Voltage 35.9 V Protection Rating IP56 Capacity 22.3 Ah	Avinox Avinox Integrated Li-ion Battery: 800Wh Voltage 35.9 V Protection Rating IP56 Capacity 22.3 Ah
Included	Avinox 168W Charger Approx. 5 h 50 min (0–100%)approx. 4 h 28 min (0–75%)	Avinox 168W Charger Approx. 5 h 50 min (0–100%)approx. 4 h 28 min (0–75%)	Avinox 168W Charger Approx. 5 h 50 min (0–100%)approx. 4 h 28 min (0–75%)
Included	AXS Extension Cord	AXS Extension Cord	Stans Sealant - 200ml
Included	Stans Sealant - 200ml	Stans Sealant - 200ml	

DRUID E CORE SPECS

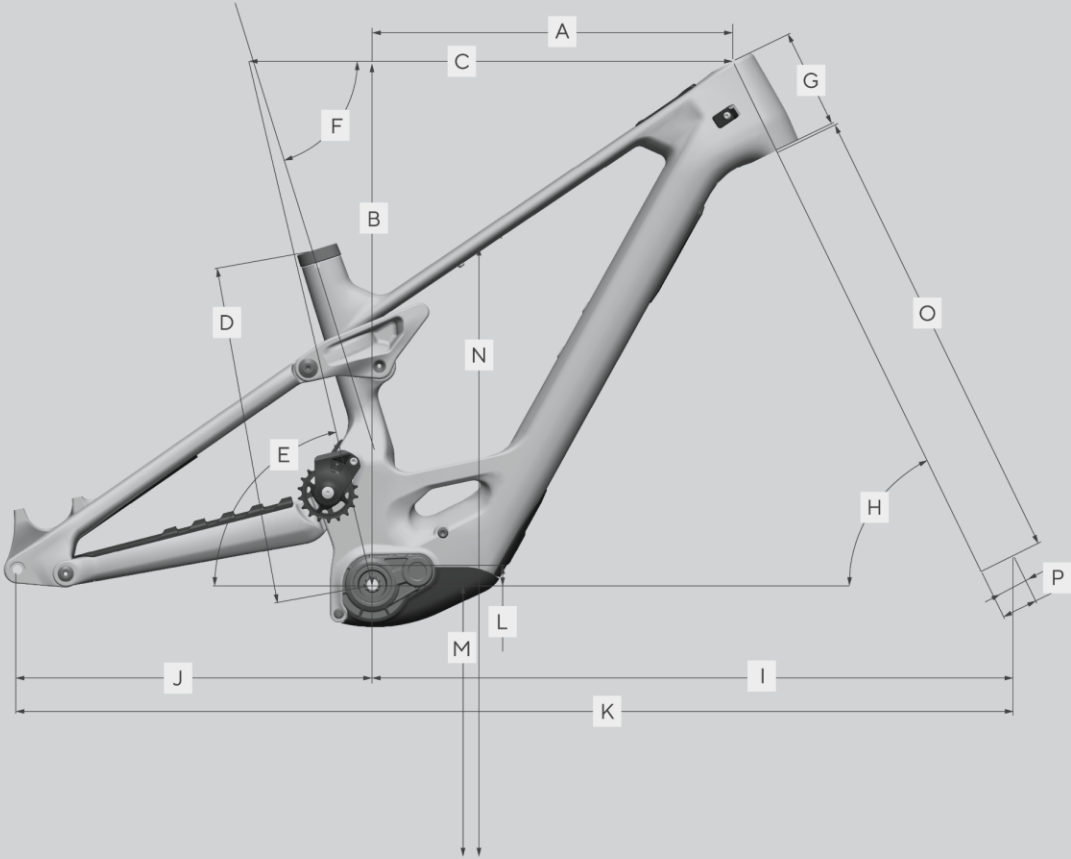

ZEB 160mm - MX		S1	S2	S3	S4
A	REACH	430	447	467	487
B	STACK	628	649	662	676
C	HORIZONTAL TOP TUBE LENGTH	578	599	622	646
D	SEAT TUBE LENGTH	400	420	440	470
E	SEAT TUBE ANGLE (effective)	76.5	76.5	76.5	76.5
F	SEAT TUBE ANGLE (actual)	70.8	72.7	74.5	76
G	HEAD TUBE LENGTH	100	123	138	153
H	HEAD TUBE ANGLE	64	64	64	64
I	FRONT CENTER	767	794	820	847
J	REAR CENTER	427	442	456	471
K	WHEELBASE	1194	1235	1276	1317
L	BB DROP	-25	-25	-25	-25
M	BB HEIGHT*	335.8	335.8	335.8	335.8
N	STANDOVER HEIGHT*	745	745	745	745
O	FORK LENGTH	576	576	576	576
P	FORK OFFSET	44	44	44	44

*Based on 29x2.4 Tire (OD 746mm) Front and 27.5x2.5 Tire (OD 708) Rear



AVINOX DRIVE SYSTEM SPECS

BATTERY		800 Wh	600 Wh	DRIVE UNIT	
BATTERY TYPE		LI-ION	LI-ION	CONTINUOUS RATED POWER	250 W
VOLTAGE		35.9 V	35.9 V	PEAK POWER	850 W (NORMAL); 1,000 W (BOOST)
PROTECTION RATING		IP56	IP56	MAXIMUM DRIVE TORQUE	105 Nm (NORMAL); 120 Nm (BOOST)
CAPACITY		22.3 Ah	16.7 Ah	TORQUE DENSITY	45 Nm/kg
ENERGY		800 Wh	600 Wh	MAXIMUM CADENCE	150 RPM
WEIGHT		APPROX. 3.74 kg	APPROX. 2.87 kg	PROTECTION RATING	IP66
				WEIGHT	APPROX. 2.52 kg
CHARGING TIME					
168 W CHARGER		APPROX. 5h 50m (0-100%)	APPROX. 4h 45m (0-100%)		
		APPROX. 4h 28m (0-75%)	APPROX. 3h 3m (0-75%)		
508 W CHARGER		APPROX. 2h 25m (0-100%)	APPROX. 2h 25m (0-100%)		
		APPROX. 1h 30m (0-75%)	APPROX. 1h 30m (0-75%)		



TOUCH SCREEN AND CONTROLS

CONTROL DISPLAY

SCREEN	2.0-INCH OLED, 326 PPI, 800 NIT
EXPANSION PORT	12 V 2.0 A, 24 W
4G LTE	LTE-CAT. 1
BLUETOOTH	BLE 5.1
POWER OUTPUT PORT	USB-C PD3.0 65 W
SENSING SYSTEM	BUILT-IN IMU, BAROMETER , COMPASS,
	AMBIENT LIGHT SENSOR, TORQUE/
	CADENCE/WHEEL SPEED SENSORS
STORAGE CAPACITY	8 GB

WIRELESS CONTROLLERS

BLUETOOTH	BLE 5.1
BATTERY	CR1620



TECH SPECS

FORK LENGTH (MAX.)	586mm	SEAT POST DIAMETER	31.6mm
RECOMENDED FORK OFFSET	44mm	MAX. SEAT POST INSERTION *	S1: 260mm S2: 275mm S3:290mm S4: 310mm
SHOCK LENGTH (EYE - EYE)	210mm	SEAT CLAMP DIAMETER	34.9mm (Included)
SHOCK STROKE	55mm	BRAKE MOUNT	200mm Post Mount
SHOCK HARDWARE (BOTH ENDS)	30x8mm	ISCG 05	N/A
HEAD TUBE DIAMETER UPPER	44mm	RECOMMENDED TIRE SIZE	27.5 x 2.5
HEAD TUBE DIAMETER LOWER	55.95mm	MAX. TIRE SIZE	27.5 x 2.6
S.H.I.S.	ZS44/28.6 ZS56/40	MAIN PIVOT BEARINGS	6903 Max (17mm x 30mm x 7mm) QTY: 2
REAR DROPOUT SPACING (O.L.D.)	148mm		6903 Max (17mm x 30mm x 7mm) QTY: 2
REAR AXLE SPECIFICATION	L180mm / TL 20mm / TP M12 x 1.00	ROCKER LINK BEARINGS	6901 Max (12mm x 24mm x 6mm) QTY: 2
BOTTOM BRACKET	N/A	HORST LINK PIVOT BEARINGS	6901 Max (12mm x 24mm x 6mm) QTY: 4
CHAIN LINE (CL)	55mm	TRUNNION MOUNT BEARINGS	6901 Max (12mm x 24mm x 6mm) QTY: 4
MAX. CHAIN RING*	S1: 36T S2: 36T S3: 38T S4: 38T	IDLER PULLEY BEARING	6903 MAX BOSL (17mm x 30mm x 7mm) QTY: 2
CHAIN LENGTHS*	S1:120 S2:122 S3:124 S4:126		

*PER FRAME SIZE